

HOLDER HANGING MADE WITH JEANS


Skill Level

Intermediate (precision sewing, layering, finishing techniques)



MATERIALS NEEDED

Assorted Blue Denim Fabric Scraps (Light & Navy Wash)
 2 Wooden Rings (approx. 5cm ID)
 Denim Tassel Cord/Yarn
 Tan Leather patches for labels
 Tan Leather Cord (for labels)
 4 Tan Metal Eyelet studs (optional)
 Heavy-duty Denim Thread (Tan)
 Interfacing/Stabilizer (for pockets)
 Scissors
 Rotary Cutter & Mat
 Sewing Machine with Denim Needle

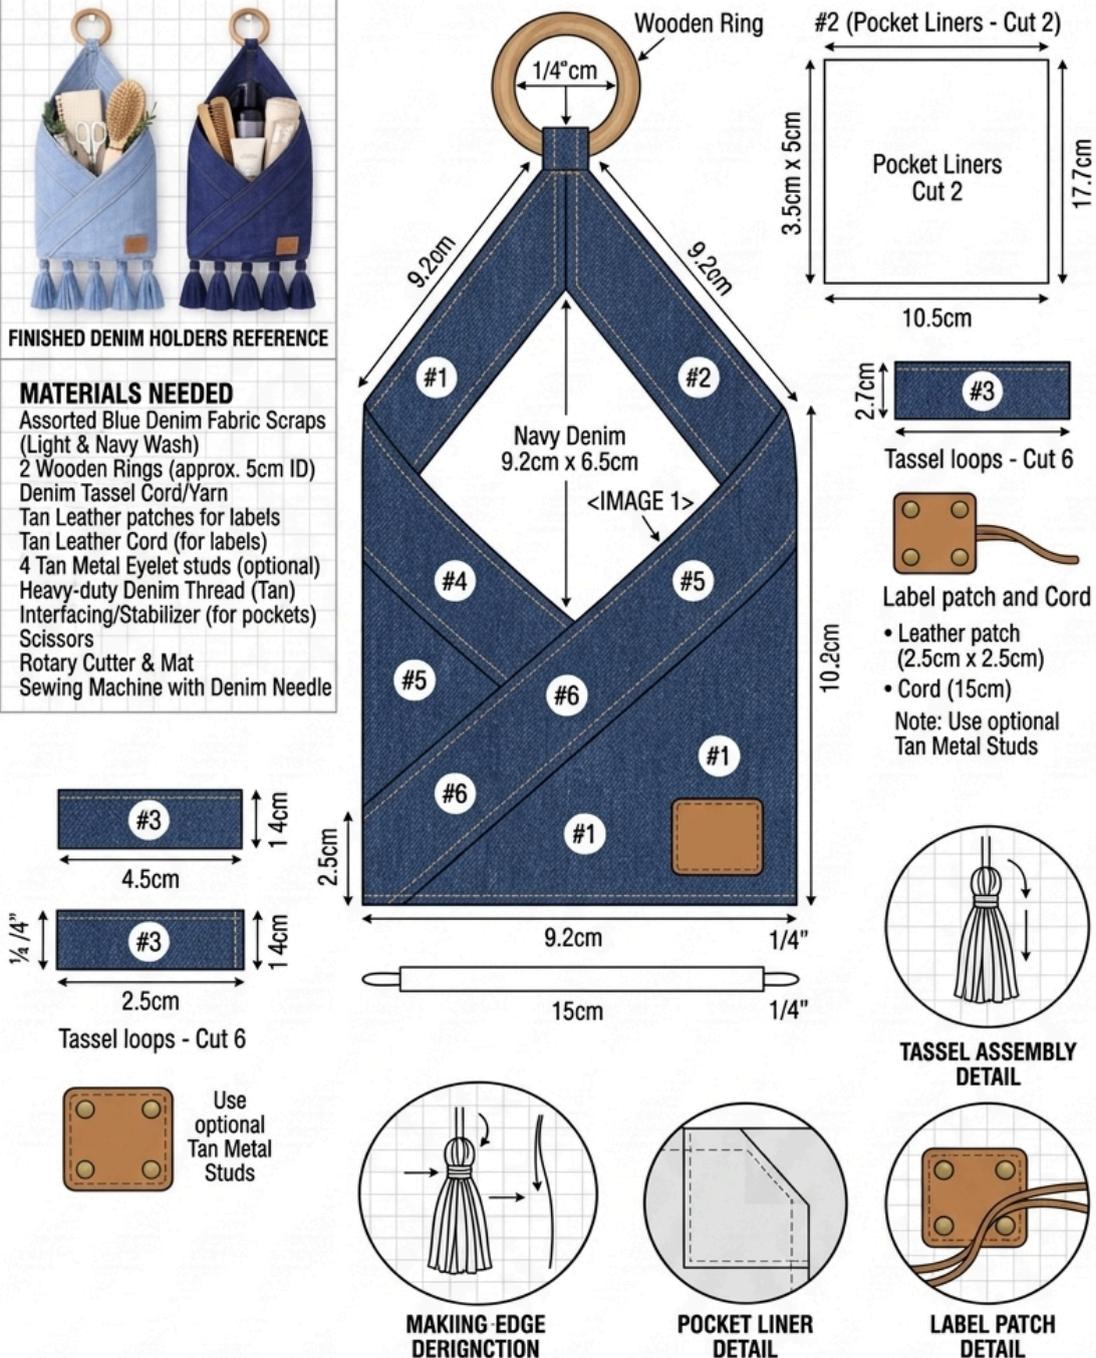

MATERIALS NEEDED

- Assorted Blue Denim Fabric Scraps (Light & Navy Wash)
- 2 Wooden Rings (approx. 5cm ID), Denim Tassel Cord/Yarn
- Tan Leather Cord (for labels)
- 4 Tan Metal Eyelet studs (optional)
- Heavy-duty Denim Thread (Tan)
- Interfacing/Stabilizer (for pockets)
- Scissors, Rotary Cutter & Mat
- Sewing Machine with Denim Needle

SEWING TIPS

- Use 0.6cm Seam Allowance
- Raw Edge Applique Style - Frayed edges are intended for look and texture (use interfacing where needed).
- Stitch close to patch edges to secure firmly.
- Press seams open or nested join.
- Reinforce top ring attachment loop with double-stitching
- Add decorative topstitching to pocket flaps as shown.
- Apply a thin layer of fabric glue before eyelet studs.

Finished Dimensions

- Total height (with ring): 22–26 cm
- Body height: 18–20 cm
- Width: 9–12 cm
- Pocket depth: 8–10 cm
- Ring diameter: ~5 cm

Materials (Detailed)

Fabrics

- Denim scraps (light, medium, dark wash)
 - Outer body: medium/heavy denim
 - Pocket panels: mixed tones for contrast
- Cotton lining fabric (optional but recommended)

Notions

- Wooden ring (5 cm diameter)
- Heavy-duty thread (polyester or denim thread)
- Interfacing (medium weight fusible)
- Leather patch (optional, 2.5 × 2.5 cm)
- Cotton cord (15 cm)
- Tassel yarn or denim strips
- Metal studs (optional)

Tools

- Sewing machine (denim needle size 90/14 or 100/16)
- Iron
- Fabric clips or pins
- Rotary cutter + ruler
- Tailor's chalk

Seam Allowance

Use **0.6 cm (1/4 inch)** unless stated otherwise

CUTTING LAYOUT (VERY IMPORTANT)

Main Pieces

- Piece #1 (Outer body front/back): Cut 2
- Piece #2 (Upper side panels): Cut 2
- Piece #4 (Left diagonal pocket): Cut 1
- Piece #5 (Right diagonal pocket): Cut 1
- Piece #6 (Bottom base panel): Cut 1

Linings

- Pocket lining: 10.5 × 17.7 cm (Cut 2)

Small Components

- Tassel loops (#3):
 - 2.5 × 4 cm → Cut 6
- Hanging loop:
 - 3.5 × 5 cm → Cut 1

STEP 1: PREPARATION

1.1 Interface Application

- Fuse interfacing to:
 - All outer body pieces (#1, #2, #4, #5, #6)
- This gives structure and durability

1.2 Edge Preparation

- Fold all top edges of pocket pieces (0.6 cm)
- Press firmly

1.3 Marking

- Mark center lines and alignment points using chalk

STEP 2: BUILDING THE FRONT POCKET STRUCTURE

2.1 Prepare Diagonal Panels

- Take piece #4 and piece #5
- Fold top edges and topstitch (clean finish)

2.2 Overlapping Layout

- Place piece #6 (base) flat
- Lay piece #4 diagonally from left to center
- Lay piece #5 overlapping from right side

👉 This creates the crossed pocket look

2.3 Stitching

- Stitch along outer edges to secure layers
- Do NOT sew pocket openings

2.4 Reinforcement

- Add topstitching (double stitch lines)
- Focus on stress areas (pocket corners)

STEP 3: ADDING POCKET LINING

3.1 Position Lining

- Place lining fabric behind pocket opening
- Right sides facing

3.2 Stitch

- Sew around pocket opening edge
- Clip corners

3.3 Turn & Press

- Turn lining inward
- Press edges flat

👉 Result: clean interior pocket

STEP 4: BUILD MAIN BODY

4.1 Attach Side Panels (#2)

- Sew piece #2 to each side of front assembly
- Press seams outward

4.2 Attach Back Panel (#1)

- Place front and back right sides together
- Stitch sides and bottom

4.3 Shape the Bottom

- Box corners (optional for depth):
 - Fold corner
 - Sew across ~2 cm

STEP 5: CREATE HANGING LOOP

5.1 Fold Strip

- Fold 3.5 × 5 cm piece lengthwise
- Sew along edge

5.2 Turn

- Turn right side out
- Press flat

5.3 Attach Ring

- Insert wooden ring
- Fold fabric over ring
- Stitch securely to top center

👉 Reinforce with X-stitch or double seam

STEP 6: CLOSING THE TOP

- Fold top edges inward
- Insert hanging loop
- Stitch across top

Optional: add decorative topstitch

STEP 7: TASSEL LOOPS

7.1 Create Loops

- Fold each small strip (#3)
- Stitch into small loops

7.2 Placement

- Evenly space along bottom edge
- Pin in place

7.3 Stitch

- Secure loops into bottom seam

STEP 8: MAKING TASSELS

Method:

1. Wrap yarn 20–30 times around fingers
2. Tie tightly at top
3. Cut bottom loops
4. Wrap top section to form head
5. Trim evenly

Attach Tassels

- Thread through loops
- Knot securely

STEP 9: LABEL PATCH (OPTIONAL)

9.1 Placement

- Bottom front corner

9.2 Attachment Options

- Sew around edges
- Attach with studs

- Add decorative cord

STEP 10: FINAL FINISHING

- Turn piece right side out
- Press entire organizer
- Check seams
- Trim loose threads

STRUCTURE & STRENGTH TIPS

- Double stitch:
 - Top edge
 - Hanging loop
- Use thicker thread for durability
- Add extra interfacing if using thin denim

PROFESSIONAL FINISH DETAILS

- Use contrasting thread for visible topstitching
- Add bar tacks at pocket corners
- Press after EVERY seam
- Keep stitching lines straight for clean look

OPTIONAL VARIATIONS

Style Upgrades

- Patchwork denim design
- Add zipper pocket
- Use colored stitching
- Add embroidery

Functional Upgrades

- Add more compartments
- Increase width for larger items
- Insert padding for structure