



Patchwork fabric dogs - Pattern

Here is a complete, detailed English tutorial based on the diagram you provided. I've kept it faithful to the measurements, structure, and sequence shown, while making it easy for anyone in the U.S. to follow from start to finish 😊

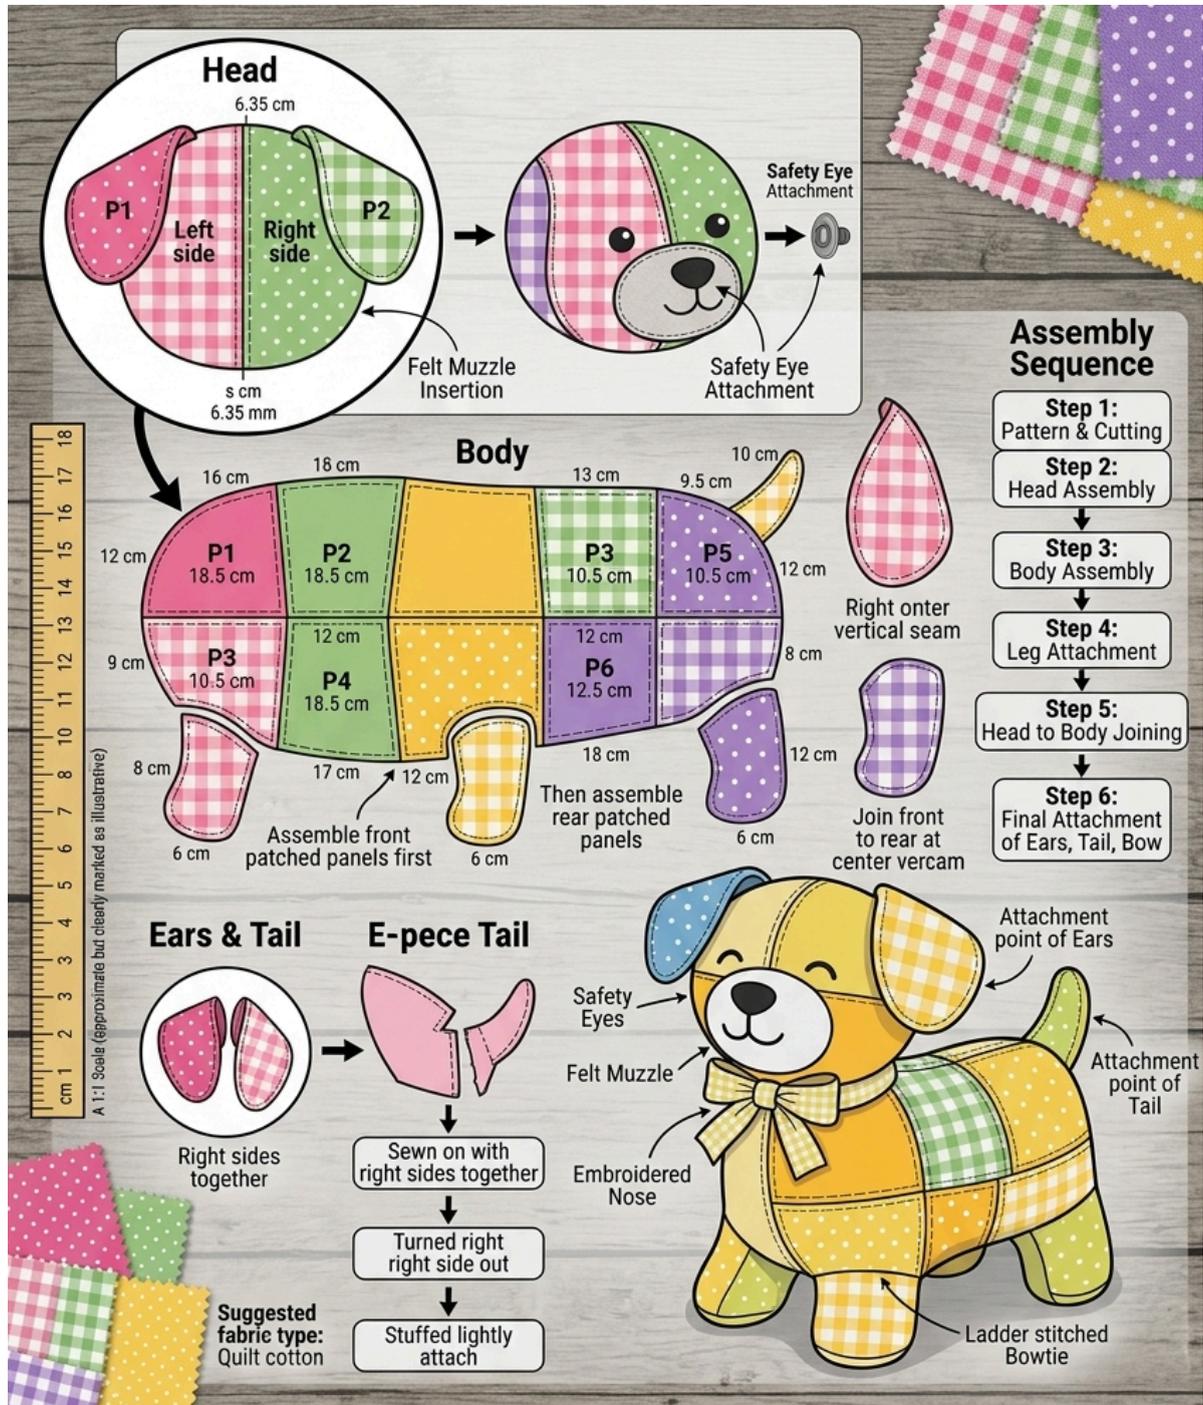

U.S. SEWING & QUILT KEY METHODS (DETAILED):

Piecing (e.g., Quarter Inch Seam Allowance)



6.35 mm (1/4") seam allowance used

Felt Muzzle Insertion




Safety Eye Attachment




Hand Embroidery (Nose & Mouth)

Turning (Right Side Out)



Invisible (Ladder) Stitch (e.g., Bowtie Attachment, final seam)



Edge Basting (for Ears/Tail attachment)





Materials & Tools

Before starting, gather everything you need:

- Quilting cotton fabric (multiple colors/patterns recommended)
- Felt (for the muzzle)
- Polyester stuffing (fiberfill)
- Safety eyes with washers
- Thread (matching or contrasting)
- Sewing machine (or hand sewing tools)
- Fabric scissors
- Pins or clips
- Fabric marker or chalk
- Ruler or measuring tape
- Needle for hand embroidery



Step 1: Pattern & Cutting

Use the measurements from the diagram to draft or trace your pattern pieces onto fabric.

Head Pieces

- Head width: 6.35 cm (2.5 inches)
- Cut:
 - Left side (P1)
 - Right side (P2)
 - Ear pieces (2 mirrored shapes)

Body Pieces

Cut the following panels:

- P1: 18.5 cm
- P2: 18.5 cm
- P3: 10.5 cm (multiple pieces)
- P4: 18.5 cm
- P5: 10.5 cm
- P6: 12.5 cm

Additional cuts:

- 4 legs (approx. 6 cm wide)
- Tail pieces
- Ear pieces
- Muzzle (felt)



Use a 6.35 mm (1/4 inch) seam allowance for all pieces.

Step 2: Head Assembly

1. Sew Head Panels

- Join left (P1) and right (P2) sides along the center seam.
- Press seam flat.

2. Insert Felt Muzzle

- Position the felt muzzle on the front.
- Sew it in place securely.

3. Attach Safety Eyes

- Insert safety eyes through fabric.
- Secure with washer on the inside.

4. Embroider Face

- Stitch the nose and mouth using hand embroidery.

Step 3: Body Assembly

1. Assemble Front Panels First

- Sew together:
 - P1 → P2 → P3 (front row)
- Then attach:
 - P4 underneath

2. Assemble Rear Panels

- Sew:
 - P3 → P5 → P6 (rear section)

3. Join Front and Rear

- Sew both sections together at the center seam.

4. Attach Legs

- Insert legs into the bottom openings.
- Align evenly and sew securely.

Step 4: Leg Attachment

- Each leg is sewn with right sides together.
- Turn right side out.
- Lightly stuff before attaching to body.

 Make sure legs are evenly spaced so the toy stands properly.

Step 5: Head to Body Joining

- Align the head opening with the body neck.
- Sew carefully around the seam.
- Reinforce stitching since this area gets stress.

Step 6: Ears & Tail Construction

Ears

- Sew ear pieces right sides together.
- Turn right side out.
- Lightly shape (no heavy stuffing).

Tail

- Sew tail pieces together.
- Turn right side out.
- Lightly stuff.

Step 7: Final Attachments

Attach Ears

- Sew onto head at marked attachment points.

Attach Tail

- Sew onto rear of body.

Add Bowtie (Optional)

- Use ladder stitch (invisible stitch) to attach.

Step 8: Turning & Stuffing

- Turn entire body right side out.
- Stuff evenly with polyester filling.

 Tips:

- Start with small amounts of stuffing.
- Push into corners (legs, head, tail).
- Avoid overstuffing seams.

Step 9: Closing Seams

- Use a ladder stitch (invisible stitch) to close openings.
- Keep stitches tight and hidden.

Step 10: Finishing Touches

- Check all seams for strength.
- Adjust stuffing if needed.
- Trim loose threads.

Optional:

- Add blush to cheeks
- Add patches or decorative stitching

Key Sewing Techniques Used

- Quarter-inch seam allowance (6.35 mm)
- Right sides together sewing
- Turning fabric inside out
- Ladder stitch (invisible closing)
- Edge basting (for ears/tail)
- Hand embroidery (face details)